

# Safe brake resistors in PTC technology



Safe brake  
resistors

# PTC8006x

# Safe brake resistor in PTC technology PTC8006x

Self-protecting PTC element (aluminum housing) with very high operating voltage limit; protection class IP20.



### Rated power (W)

See tables

### Resistance values (Ohm)

See tables

### Dimensions (mm)

Enclosure: See tables  
Wiring: up to 450 mm  
Ø AWG 20 or 0.51 mm<sup>2</sup>  
FEP isolated,  
UL Style 1901

With four mechanical and electrical ranges of 35, 70, 105 and 140 watts continuous power on a heat sink, the PTC brake resistors cover the power requirements of small frequency inverters and servo controllers. Similar to the level of wire-based brake resistors, the impulse power ratings are of major importance for the applications and have a factor of 35 with a 1 percent duty cycle. The elements which may be installed in the inverter's enclosure are also known as ballast resistors and have an IP20 protection class. Several mechanical designs are available in the series. Customer requirements are implemented as necessary when the order involves sufficient quantities. The resistance values for each type are dynamic with respect to the temperature at the PTC (see R(T) curve) and the applied voltage.

### Technical specifications

( $\vartheta_A = 20^\circ\text{C}$ , unless otherwise stated)

Parameter	Symbol	Wert	Einheit	Bedingungen
Tolerance (resistance)		$\pm 35$	%	Caution: Typical for thermistors and not reducable
Max. perm. operating voltage	$U_B$	$\leq 600$ AC $\leq 848$ DC	V	according to CSA
Threshold limit voltage DC	$U_{BD}$	1300 (1750 Ohm) 1100 ( 350 Ohm) 900 ( 175 Ohm)	V	Caution: Abruptly low resistance (reaction like a short circuit)
Isolation voltage <sup>1</sup>	$U_{ISO}$	$\geq 4000$	AC V	$f = 50 \text{ Hz}; t = 1 \text{ s}$
Surface temperature at constant load with $U_N$	$T_o$	$175 \pm 10$	K	$^\circ\text{C}$ The temperature will stay within the tolerance at a constant load of 500VAC
Transiston temperature	CP	140	$^\circ\text{C}$	Depending form the material, describes the temperature at which the resistance reaches two times the rate of its lowest value
Cold resistance at 25°C	$R_{25}$	s. Page 3	$\Omega$	Caution: Dynamic value, depending on the temperature of the PTC! (cf. the characteristic curve of R(T)) and the applied voltage!
Energy consumption	E	660	J (Ws)	bei 1.2s (1% ED)
Pulse rating	$P_1$	$\leq 20$	kW	Value in Approximation
Storage temperature	$\vartheta_s$	-25 ... +85	$^\circ\text{C}$	
Certifications	cCSAus			acc. to standard CSA-C22.2 and UL 508



### Versions



PTC



PTC with connector



PTC with customer specific connector




PTC with customer specific connector

<sup>1</sup> Period spikes against the grounded resistor housing (PE) must not exceed 700 VDC, otherwise the housing must be isolated from PE and finger safe installed.


### Resistance-Voltage-Characteristic

Brake resistor PTC8006xx  
Type specific of request  
— at 25 °C — at 90 °C

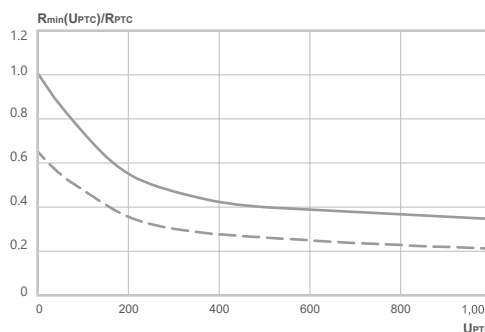


### Case temperature

Brake resistor PTC8006xx  
Resistance-temperature characteristic  
Type specific of request

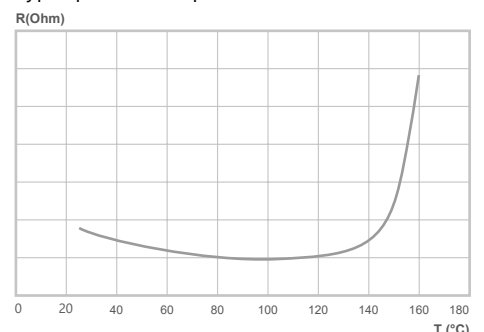

Dimensions and mounting holes (mm)

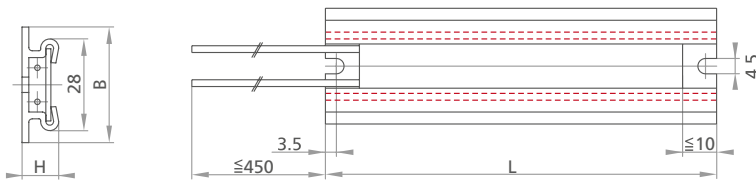


PTC - 35 W

( $\vartheta_A = 20^\circ\text{C}$ , unless otherwise stated)

Parameter	Symbol	Value	Unit	Conditions
Resistances	R	175, 350, 1750	$\Omega$	<sup>2</sup>
Rated power	P	10	W	unobstructed convection on heat sink (70 °C)
		35	W	
Dimensions	L	59.5	mm	no mounting holes <sup>3</sup>
		73.0	mm	
	W	89.0	mm	
		34.0	mm	alternatively
		H	10.7	
		11.5	mm	


Impulse loading

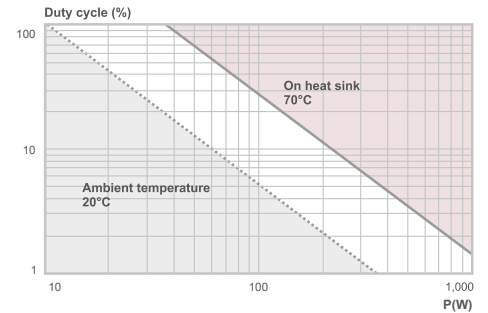

PTC - 70 W

( $\vartheta_A = 20^\circ\text{C}$ , unless otherwise stated)


Parameter	Symbol	Value	Unit	Conditions
Resistances	R	90, 175, 875	$\Omega$	<sup>2</sup>
Rated power	P	20	W	unobstructed convection on heat sink (70 °C)
		70	W	
Dimensions	L	100.0	mm	<sup>3</sup>
		115.0	mm	
	W	34.0	mm	
		H	10.7	mm

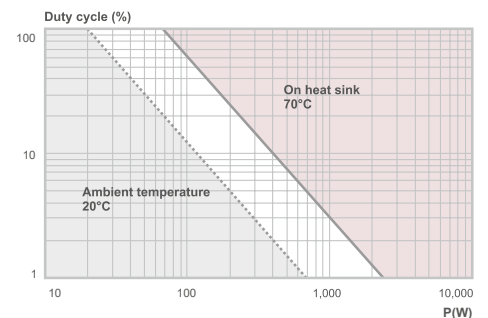

PTC - 105 W

( $\vartheta_A = 20^\circ\text{C}$ , unless otherwise stated)


Parameter	Symbol	Value	Unit	Conditions
Resistances	R	60, 120	$\Omega$	<sup>2</sup>
Rated power	P	30	W	unobstructed convection on heat sink (70 °C)
		105	W	
Dimensions	L	139.0	mm	<sup>3</sup>
	W	34.0	mm	
	H	10.7	mm	

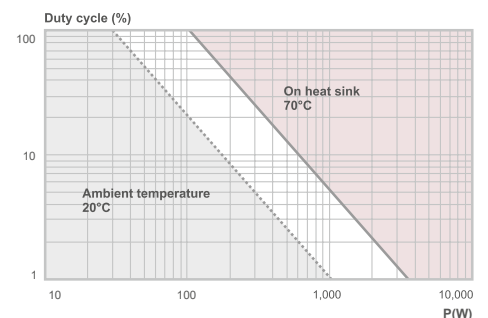

PTC - 140 W

( $\vartheta_A = 20^\circ\text{C}$ , unless otherwise stated)

Parameter	Symbol	Value	Unit	Conditions
Resistances	R	44, 88, 437,5	$\Omega$	<sup>2</sup>
Rated power	P	40	W	unobstructed convection on heat sink (70 °C)
		140	W	
Dimensions	L	167.0	mm	<sup>3</sup>
	W	34.0	mm	
	H	10.7	mm	

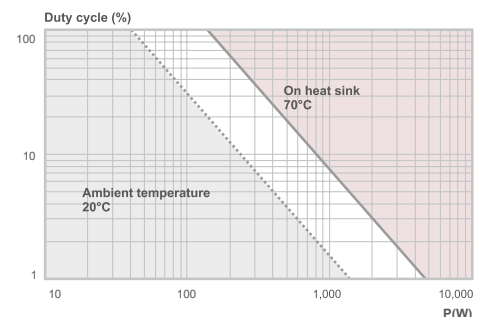


<sup>2</sup> The resistance values for each type are dynamic with respect to the temperature at the PTC (see R(T) curve) and the applied voltage. <sup>3</sup> Dimensions with tolerances

## What we offer:

- Tested product quality
- Certified processes
- Individual application support
- Machine specific design and sizing
- Rapid reaction
- Quick delivery times
- On-time delivery
- Reliable partner
- Long-term business relationship
- Direct customer relations

Use our communication channels:

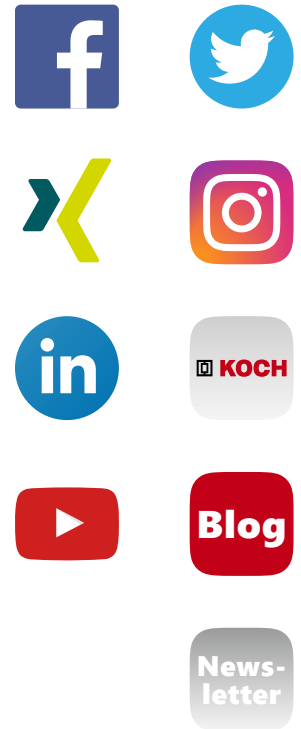

## Your specialist for:

- Active energy management devices and systems
- Safe brake resistors

We look forward to hearing from you!



Michael Koch GmbH  
Zum Grenzgraben 28, 76698 Ubstadt-Weiher, Tel. +49 7251 96 26-200  
www.brakeenergy.com, mail@bremsenergie.de

Technical changes reserved. MK\_DAT\_PTC\_ENG\_R01\_0

